

*Tropical Series*

# SUBMITTAL DATA – VRF OUTDOOR UNIT

## CTVS-EMO-C-250-C-CE-DC-1

### VRF COOLING ONLY

**Job:****Location:****Schedule No.:****System Designation:****Engineer:****Architect:****Date:****For:**  **Reference**  **Approval**  **Review**  **Construction****FEATURES**

- All DC Inverter Technology
- Floating Evaporating Temperature
- Multi Silent Mode
- Back Up Operation
- Selectable High ESP (Optional)
- Wide Application Range
- Capacity Output Limitation
- Multi Priority Mode
- Auto Dust Cleaning (Optional)
- Anti-corrosion Protection (Optional)
- Auto Addressing
- Intelligent Duty Cycle Operation
- Real-time Refrigerant Amount Monitoring
- Auto Refrigerant Charging (Optional)

**SPECIFICATIONS****PERFORMANCE**

Cooling Capacity <sup>1</sup>	Btu/h	249,300
EER	Btu/W*h	11.2
Power Input	kW	22.2
Heating Capacity <sup>1</sup>	Btu/h	/
COP	Btu/W*h	/
Power Input	kW	/

**ELECTRICAL DATA**

Power Supply	V/Ph/Hz	220V,3Ph,50/60Hz
Minimum Circuit Ampacity	A	91.5
Total Over-current Amps.	A	107.0
Max. Fuse Amps.	A	100.0
Compressor RLA	A	43.0+42.8
No. of Compressors	/	2
Outdoor Fan Power Input	W	560+560
Outdoor Fan FLA	A	9.2

**GENERAL DATA**

Connection Ratio	%	50% to 130%
Max. # of Indoor Units	/	43
Sound Pressure Level	dB(A)	64
Outdoor Fan Air Volume	m <sup>3</sup> /h(CFM)	19,600(11,536)
Refrigerant type	/	R410A
Factory refrigerant charge	kg(lbs.)	19(41.9)

**DIMENSIONS**

Unit Dimensions mm(in.)	Height	1615(63-9/16)
	Width	1585(62-3/8)
	Depth	765(30-1/8)
Liquid Pipe Connection	mm(in.)	Φ19.1(Φ3/4)
Gas Pipe Connection	mm(in.)	Φ34.9 (Φ1-3/8)
Net Weight	kg(lbs.)	352 (776)
Shipping Weight	kg(lbs.)	376 (829)

**OPTIONAL ACCESSORIES**

1. Cooling and Heating Capacity data is rated at the following conditions:

**Cooling:** 80.6 ° F DB / 66.2 ° F WB Indoor, 95 ° F DB Outdoor;

**Heating:** 68 ° FDB Indoor, 44.6 ° F DB / 42.8 ° F WB Outdoor;

Note – Due to Comfort Time ongoing commitment to quality, specifications, ratings and dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service, Maintenance and operation may cause property damage or personal injury.


Installation, service and operation must be performed by a qualified installer, servicing and operation agency.



*Tropical Series*

SUBMITTAL DATA – VRF OUTDOOR UNIT  
CTVS-EMO-C-250-C-CE-DC-1  
VRF COOLING ONLY

## DIMENSIONAL DRAWINGS - INCHES (MM)

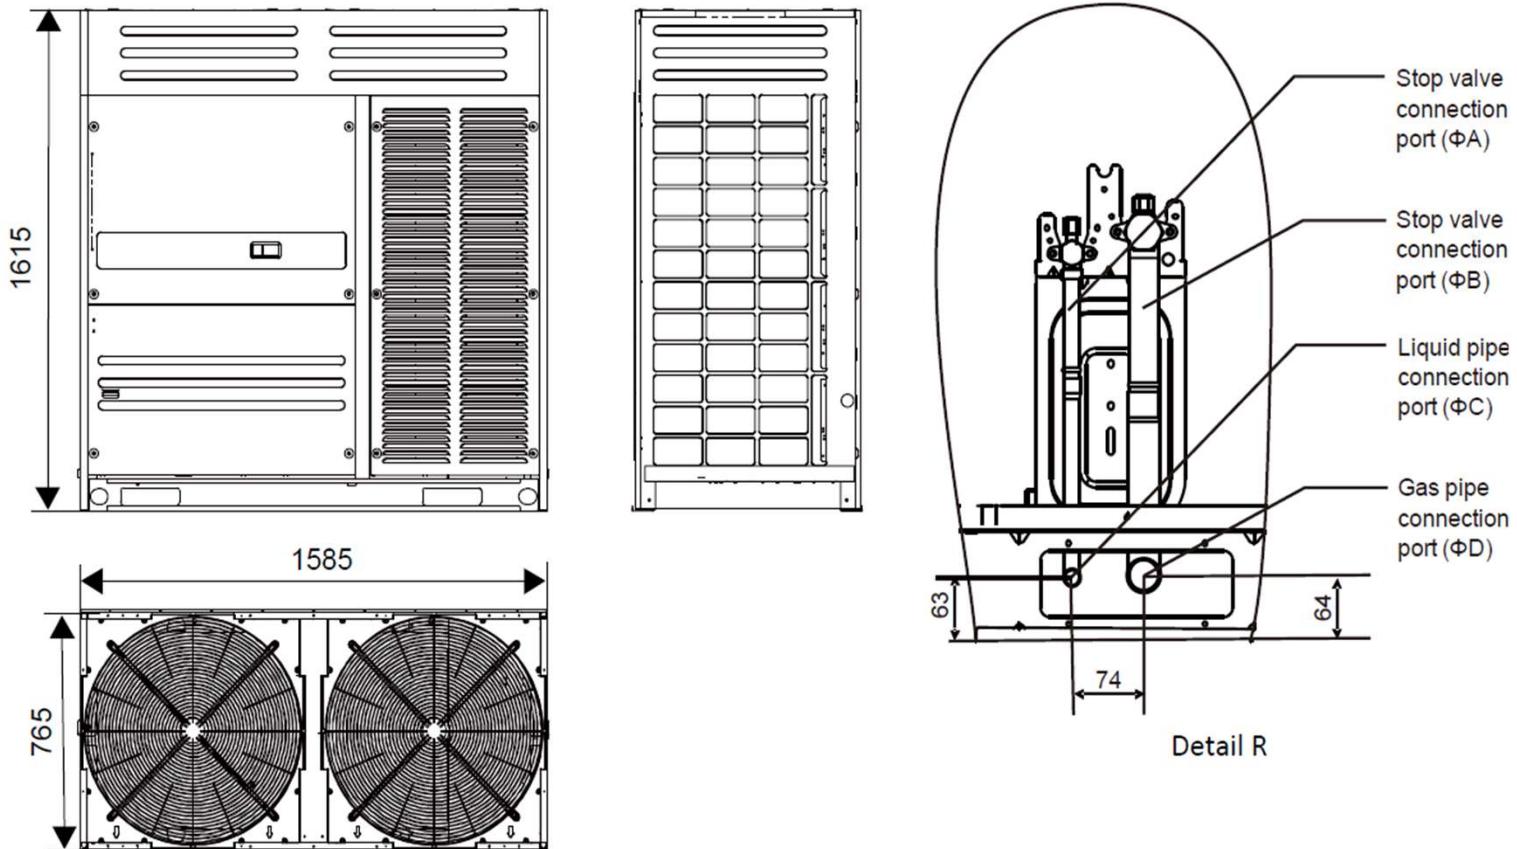

A	B	C	D	E	F	G
Φ19.1(3/4")	Φ35.0(1-3/8")	Φ19.1(3/4")	Φ31.8(1-1/4")	63(2-15/32")	74(2-7/8")	64(2-17/32")

Note – Due to Comfort Time ongoing commitment to quality, specifications, ratings and dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service, Maintenance and operation may cause property damage or personal injury. Installation, service and operation must be performed by a qualified installer, servicing and operation agency.