

Job:

Engineer:

Location:

Architect:

Schedule No.:

Date:

System Designation:

For: **Reference** **Approval** **Review** **Construction**

FEATURES

- All DC Inverter Technology
- Floating Evaporating Temperature
- Multi Silent Mode
- Back Up Operation
- Selectable High ESP (Optional)
- Wide Application Range
- Capacity Output Limitation
- Multi Priority Mode
- Auto Dust Cleaning (Optional)
- Anti-corrosion Protection (Optional)
- Auto Addressing
- Intelligent Duty Cycle Operation
- Real-time Refrigerant Amount Monitoring
- Auto Refrigerant Charging (Optional)

SPECIFICATIONS

PERFORMANCE

	HP	10
Cooling Capacity (1)	Btu/h	95,500
	kW	28.0
EER	Btu/W*h	4.5
Power Input Cooling	kW	6.22
Heating capacity (2)	Btu/h	107,500
	kW	31.5
COP	Btu/W*h	5.3
Power Input Heating	kW	5.94

ELECTRICAL DATA

Power Supply	V/Ph/Hz	220/3/60
Minimun Circuit Ampacity	A	35
Total Over-current Amps.	A	41.6
Max Fuse Amps	A	40
Compressor RLA	A	19.7
No. Compressors		1
Outdoor Fan Power Input	W	465
Outdoor Fan FLA	A	4.6

GENERAL DATA

Connection Ratio	%	50-130%
Max Indoor Units		16
Sound Pressure Level (4)	dB(A)	59
Outdoor Fan Air Volume	m3/h (CFM)	12000 (7062)
Refrigerant Type		R410A
Factory refrigerant charge	Kg (Lbs)	9(20)

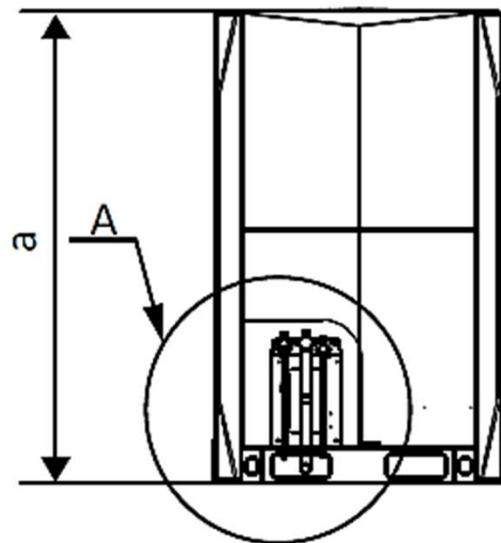
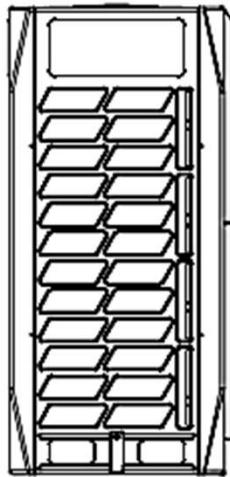
DIMENSIONS

Unit Dimensions mm (inch) WxHxD	Net	990×1635×790 (39×64-3/8×31-1/8)
	Packed	1090×1805×860 (42-7/8×71-1/16×33-7/8)
Liquid Pipe Connection (3)	mm (inch)	Φ12.7 (Φ1/2")
Gas Pipe Connection (3)	mm (inch)	Φ25.4 (Φ1")
Oil balance Pipe	mm (inch)	Φ6.35 (Φ1/4")
Net Weight	Kg (Lbs)	219 (483)
Shipping Weight	Kg (Lbs)	234 (516)

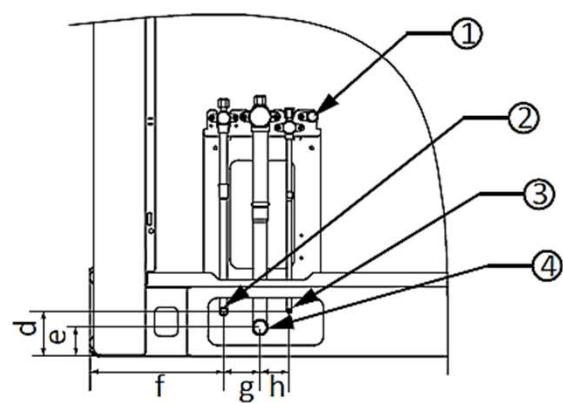
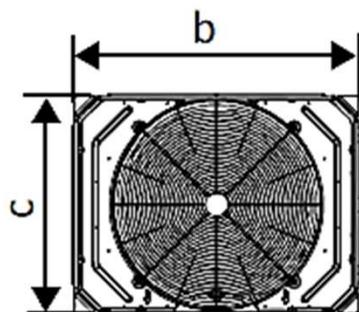


Notes:

1. Indoor air temperature 27°C (80.6°F) DB, 19°C (66.2°F) WB; outdoor air temperature 35°C (95.0°F) DB; equivalent refrigerant piping length 7.5m (24.6ft.) with zero level difference.
2. Indoor air temperature 20°C (68.0°F) DB; outdoor air temperature 7°C (44.6°F) DB, 6°C (42.8°F) WB; equivalent refrigerant piping length 7.5m (24.6ft.) with zero level difference.
3. Diameters given are those of the unit's stop valve.
4. Sound pressure level is measured at a position 1m (3.28ft.) in front of the unit and 1.3m (4.26ft.) above the floor in a semi-anechoic chamber.

DIMENSIONAL DRAWINGS - INCHES (MM)

Dimensions (unit: mm (in.))

a	1635 (64-3/8")
b	990 (39")
c	790 (31-1/8")
d	77 (3-1/32")
e	50 (1-15/16")
f	229 (9")
g	63 (2-1/2")
h	50 (1-15/16")


Detail A
Legend

No.	Parts Name	Remarks
1	Check Ports	The check port is used to measure system pressure, charge refrigerant and vacuumize the system.
2	Liquid Pipe connection port	Φ12.7mm (Φ1/2") brazed connection on CTVS-EMO-H-086-E-CE-DC-1 and CTVS-EMO-H-096-E-CE-DC-1 Φ15.9mm (Φ5/8") brazed connection on CTVS-EMO-H-120-E-CE-DC-1
3	Oil balance connection port	The oil balance pipe runs between outdoor units. Φ8mm (Φ5/16") brazed connection.
4	Gas Pipe connection port	Φ25.4mm (Φ1") brazed connection on CTVS-EMO-H-086-E-CE-DC-1 and CTVS-EMO-H-096-E-CE-DC-1 Φ28.6mm (Φ1-1/8") brazed connection on CTVS-EMO-H-120-E-CE-DC-1