

Job:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: ☐ Reference ☐ Approval ☐ Review ☐ Construction

FEATURES

- All DC Inverter Technology
- 7 Speed
- High-lift Drain Pump
- Wide Application Range
- Single Fan Motor
- Two Blowers
- Flexible Control and Easy Maintenance
- Heating and Cooling
- Convenient Installation

SPECIFICATIONS

PERFORMANCE

Nominal Cooling Capacity	Btu/h	38,200
	Kw	11.2
Nominal Heating Capacity	Btu/h	42,700
	Kw	12.5

ELECTRICAL DATA

Power Supply	V/Ph/Hz	220-240/1/50-60
Power Input (10 Pa) Cooling	Kw	200
Power Input (10 Pa) Heating	Kw	200
Min. Voltage	Volts	198
Max. Voltage	Volts	264
MCA	Amp	1.50
MFA	Amp	15
Rated Motor Output	Kw	0.15
FLA	Amp	1.20

GENERAL DATA

Speed (H/M/L)	RPM	920
	RPM	884
	RPM	847
	RPM	810
	RPM	770
	RPM	730
	RPM	690
Airflow rate 3	m3/h (CFM)	1500 (883)
	m3/h (CFM)	1430 (842)
	m3/h (CFM)	1360 (800)
	m3/h (CFM)	1290 (759)
	m3/h (CFM)	1210 (712)
	m3/h (CFM)	1140 (671)
	m3/h (CFM)	1080 (636)
External static pressure 4	Pa	20 (10~100)
Sound pressure level 5	dB(A)	39
	dB(A)	38
	dB(A)	38
	dB(A)	37
	dB(A)	35
	dB(A)	34
	dB(A)	33
Dimmension	Net (mm)	1230×270×775
	Packed (mm)	1355×350×795
Net/Gross weight	KG (Lbs)	37 / 45 (81.6/99.2)
Refrigerant type		R410A
Design pressure (H/L)	Mpa	4.4 / 2.6
Refrigerant Pipe Connections (inch)	Gas	3/8"
	Liquid	3/4"
Drain Pipe	inch	1"



Notes:


- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
- Fan motor speed and air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
- Stable operation external static pressure range. (Note: setting external static pressure outside the unit's optimal static pressure range may lead to higher noise levels and lower airflow rate. For the optimal external static pressure range refer to the unit's installation manual.)
- Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.

OPTIONAL ACCESSORIES


Wired Thermostat CTVS-C-WR86E/KD (not included)

DIMENSIONAL DRAWINGS - INCHES (MM)


Outline dimension and air outlet opening size

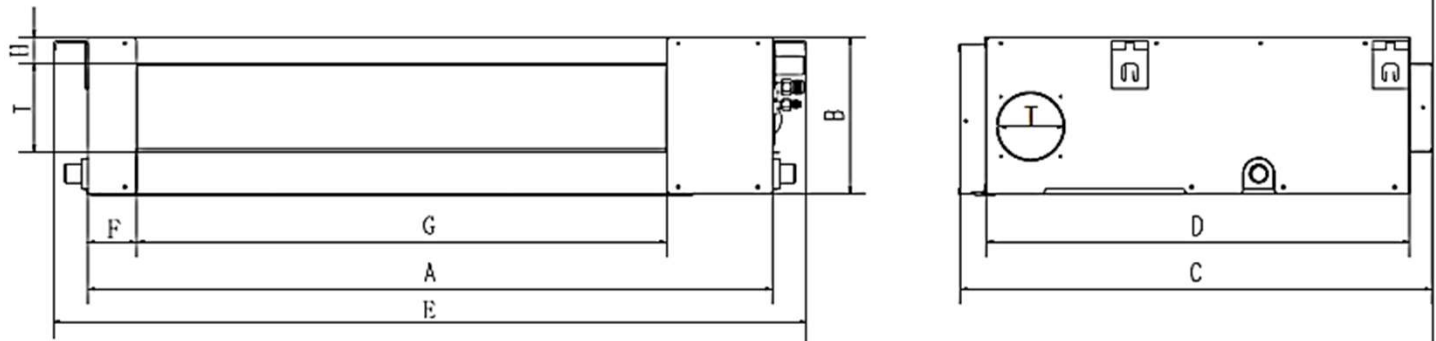


Air return opening size

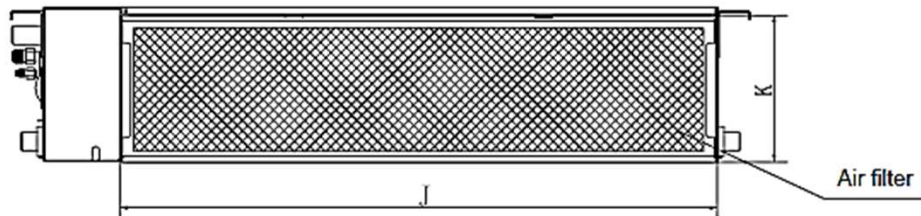

Position size of descensional ventilation opening

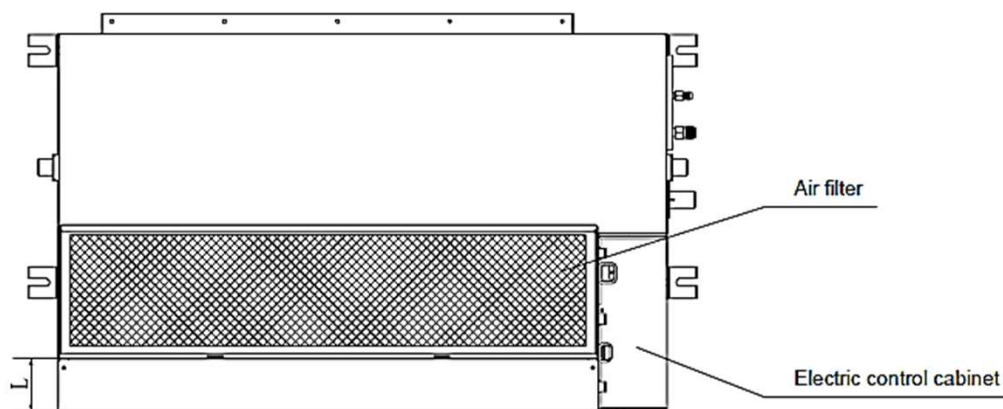

Size of mounted lug

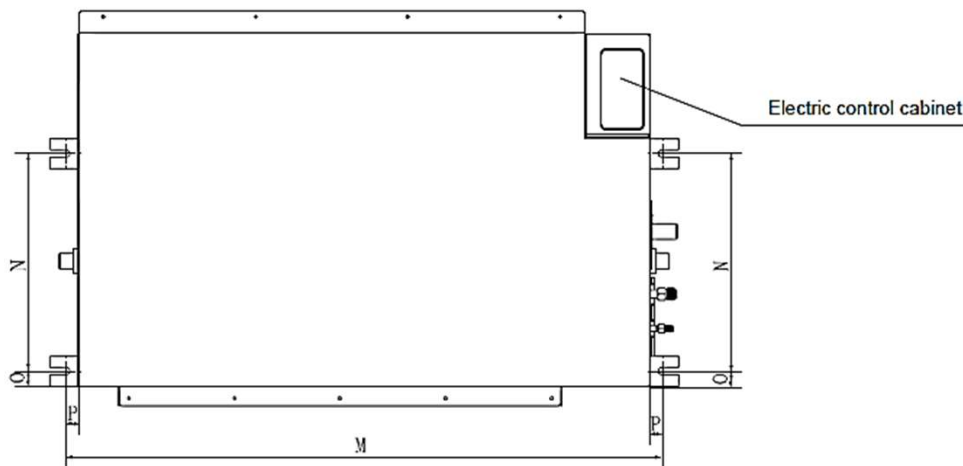

	mm
A	1,200
B	300
C	865
D	800
E	1,290
F	85
G	969
H	40
I	204
J	1,094
K	288
L	45
M	1,240
N	500
O	26
P	20