

Job: _____
Location: _____
Schedule No.: _____
System Designation: _____

Engineer: _____
Architect: _____
Date: _____
For: **Reference** **Approval** **Review** **Construction**

FEATURES

- All DC Inverter Technology
- Wide Application Range
- Flexible Control and Easy Maintenance
- 7 Speed
- Single Fan Motor
- Heating and Cooling
- High-lift Drain Pump
- Convenient Installation

PERFORMANCE

Nominal Cooling Capacity	Btu/h	19,100
	Kw	5.6
Nominal Heating Capacity	Btu/h	21,500
	Kw	6.3

ELECTRICAL DATA

Power Supply	V/Ph/Hz	220-240/1/50-60
Power Input (10 Pa) Cooling	Kw	115
Power Input (10 Pa) Heating	Kw	115
Min. Voltage	Volts	198
Max. Voltage	Volts	264
MCA	Amp	1.20
MFA	Amp	15
Rated Motor Output	Kw	0.10
FLA	Amp	0.95

GENERAL DATA

Airflow rate 3	m3/h (CFM)	800 (471)
	m3/h (CFM)	750 (441)
	m3/h (CFM)	700 (412)
	m3/h (CFM)	650 (383)
	m3/h (CFM)	600 (353)
	m3/h (CFM)	550 (324)
	m3/h (CFM)	500 (294)
Sound pressure level 5	dB(A)	43
	dB(A)	42
	dB(A)	41
	dB(A)	41
	dB(A)	39
	dB(A)	38
	dB(A)	38
Dimmension	Net (mm)	990×660×203
	Packed (mm)	1089×744×296
Weight Net/Gross	KG (Lbs)	28/34 61.7/75
Refrigerant type		R410A
Design pressure (H/L)	Mpa	4.4/2.6
Refrigerant Pipe Connections (inch)	Gas	5/8"
	Liquid	3/8"
Drain Pipe (OD)	mm	16



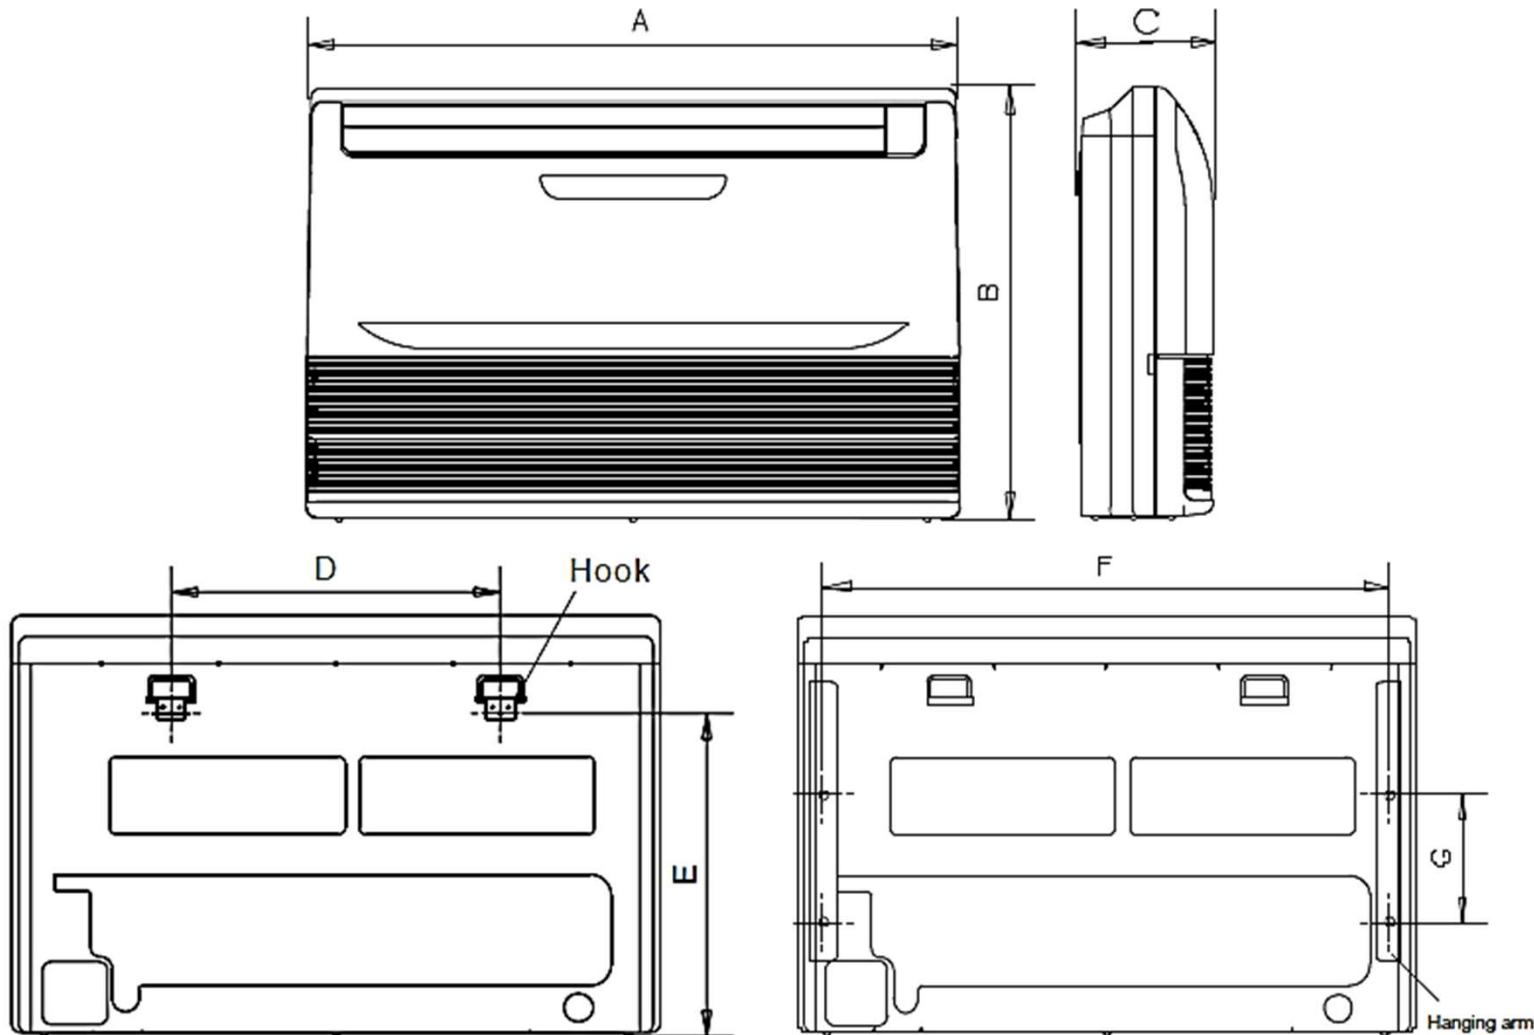
Notes:

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Fan motor speed and air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
4. Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

OPTIONAL ACCESSORIES

Wireless Thermostat CTVS-C-WL05B (not included)

DIMENSIONAL DRAWINGS - INCHES (MM)


Model	Dimensions							Connections			
	(mm)							Gas Pipe		Liquid Pipe	
	A	B	C	D	E	F	G	mm	inch	mm	inch
CTVS-IPT-X-012-A-CE-DC-1											
CTVS-IPT-X-015-A-CE-DC-1											
CTVS-IPT-X-019-A-CE-DC-1	990	660	203	505	506	907	200	Φ12.7	Φ 1/2"	Φ6.35	Φ 1/4"
CTVS-IPT-X-024-A-CE-DC-1											
CTVS-IPT-X-027-A-CE-DC-1											
CTVS-IPT-X-031-A-CE-DC-1	1,280	660	203	795	506	1,195	200	Φ15.9	Φ 5/8"	Φ9.53	Φ 3/8"
CTVS-IPT-X-038-A-CE-DC-1											
CTVS-IPT-X-048-A-CE-DC-1											
CTVS-IPT-X-055-A-CE-DC-1	1,670	680	244	1,070	450	1,542	200				